

TECNARE
S.p.A. - Via S. Giovanni 10 - 20122 Milano




SOUND SERVICES

Professionals in licht en geluid



Ramshoorn 33
4824AG Breda
tel. 076-5324440
mobiel.: 06-83566152
e-mail: mail@soundservices.nl

E6 is a compact 2-way full-range loudspeaker system comprised of one 6-inch low frequency driver and one 1-inch (25 mm) exit voice-coil compression driver. Its exceptional dispersion provides 135° by 125° coverage in vertical cabinet orientation. Highslope passive crossovers minimize band overlap and well-controlled off-axis response. The cabinet is fitted with M8 threaded suspension points and Speakon® NL4 connectors. The enclosure has been made with the latest techniques ensuring a perfect and rigid construction.

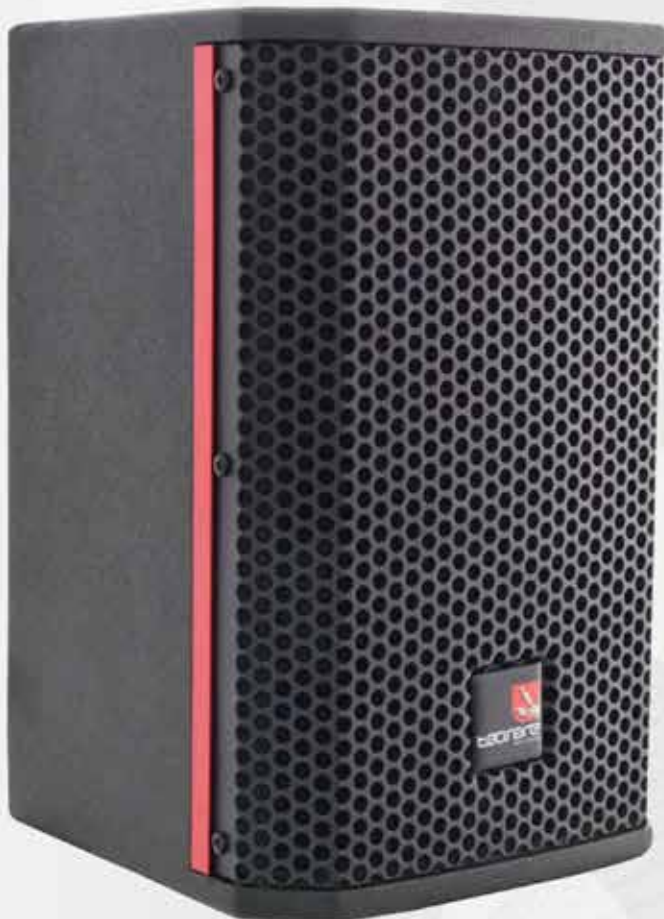

- Features:

- * Compact, vented two-way system
- * 1 x 6½-inch-LF/ 1 x dome tweeter
- * High-output, low profile

- Applications:

- * Performing spaces
- * Gyms, museums and AV spaces
- * Multimedia spaces
- * Retail outlets
- * Educational Facilities

-Frequency Response:	70 Hz – 18 kHz ± 3dB, measured on axis
-Components:	1 x 6,5-inch LF driver and 1 x 1-inch Tweeter
-Nominal Dispersions:	135°H x 125°V @ 6dB point
-Impedance:	16 Ohm
-Axial Sensitivity:	88dB (1w/1m)
-Calculated SPL:	107 dB continuous / 113 peak
-Power Handling:	80 W AES / 160 W continuous
-Dimensions (HxWxD) (millimeters/inches):	313 x 205 x 212 (mm) / 12.32"x 8.07" x 8.34"
-Net Weight (kg/Pounds):	5,5 kg. / 12.12 lbs.
-Construction:	16mm birch plywood. Finished in black paint
-Grille:	Powder coated perforated steel with acoustically transparent reticulated foam.

E8 is a compact 2-way full-range loudspeaker system comprised of one 8-inch low frequency driver and one 25mm soft cone paper tweeter. Its exceptional axi-symmetric dispersion provides 130° coverage. The internal passive crossovers custom network minimize band overlap and well-controlled off-axis response. The cabinet is fitted with M8 threaded suspension points and Speakon® NL4 connectors. The enclosure has been made with the latest techniques ensuring a perfect and rigid construction.



- Features:

- * Compact, vented two-way system
- 1 x 8-inch-LF/ 1 x cone paper tweeter
- * Multiple Attachment Points for maximum flexibility

- Applications:

- * Performing spaces
- * Gyms, museums and AV spaces
- * Multimedia spaces
- * Retail outlets
- * Educational Facilities

-Frequency Response:	80 Hz – 18 kHz ±3dB, measured on axis
-Components:	1×8" LF driver, 1 paper cone tweeter HF
-Nominal Dispersions:	130°H x 130°V@-6dB points
-Impedance:	8 Ohm
-Axial Sensitivity:	90dB (1w/1m)
-Calculated SPL:	110 dB continuous / 116 peak
-Power Handling:	120 W AES / 240W continuous
-Dimensions (HxWxD) (millimeters/inches):	381 x 249 x 269 mm / 15" x 9.80" x 10.59"
-Net Weight (kg/Pounds):	7,1 kg / 15.65 lbs.
-Construction:	16mm birch plywood. Finished in black paint
-Grille:	Powder coated perforated steel with acoustically transparent reticulated foam.

E10 is a compact 2-way full-range loudspeaker system comprised of one 10-inch low frequency driver and one 1-inch exit/35 mm, 1.75 in (44mm) voice-coil compression driver. Its CD Horn provides 120° by 100° coverage in vertical cabinet orientation. The internal passive crossovers custom network minimize band overlap and well-controlled offaxis response. The cabinet is fitted with M8 threaded suspension points and Speakon® NL4 connectors. The enclosure has been made with the latest techniques ensuring a perfect and rigid construction.



● Features:

- * Compact, vented two-way system
1 x 10-inch-LF/ 1 x 1-inch HF
compression driver
- * Integrate suspension points and pole
mount cup
- * Internal passive crossover network

● Applications:

- * Performing spaces
- * Gyms, museums and AV spaces
- * Multimedia spaces
- * Retail outlets
- * Educational Facilities

-Frequency Response:	50 Hz – 20 kHz +3dB, measured on axis
-Components:	1×10" LF driver, 1×1" HF driver on a CD horn
-Nominal Dispersions:	120°H x 100°V@-6dB points
-Impedance:	8 Ohm
-Axial Sensitivity:	91dB (1w/1m)
-Calculated SPL:	114 dB continuous / 120 peak
-Power Handling:	240 W AES / 480 W continuous
-Dimensions (HxWxD) (millimeters/inches):	550x298x342 mm / 21.65" x 11.73" x 13.46"
-Net Weight (kg/Pounds):	13,6 Kg / 29.98 lbs
-Construction:	16mm birch plywood. Finished in black paint. Two recessed carrying handle.
-Grille:	Powder coated perforated steel with acoustically transparent reticulated foam

E12 is a compact 2-way full-range loudspeaker system comprised of one 12-inch low frequency driver and one 1-inch exit/25 mm, 1.5 in /38mm voice-coil compression driver. The CD horn provides 120° by 80° coverage in vertical. The internal passive crossovers custom network minimize band overlap and well-controlled offaxis response. The cabinet is fitted with M10 threaded suspension points and Speakon® NL4 connectors. The enclosure has been made with the latest techniques ensuring a perfect and rigid construction.



- Features:

- * Full Range Compact two-way system
- * 1 x 12-inch-LF/ 1 x 1-inch exit (1.5-inch coil) HF on a CD horn
- * Integrate suspension points and pole mount cup
- * Internal passive crossover/filter network

- Applications:

- * Performing spaces
- * Stand alone system
- * Near-field applications
- * Background music
- * Mobile and fixed installation

-Frequency Response:	50 Hz – 20 kHz ±3dB, measured on axis
-Components:	1×12" LF driver, 1×1" HF driver on a CD horn
-Nominal Dispersions:	120° x 80° HF CD horn @-6dB points
-Impedance:	8 Ohm
-Axial Sensitivity:	93dB (1w/1m)
-Calculated SPL:	116 dB continuous / 122 dB Peak
-Power Handling:	320 W AES / 640 W continuous
-Dimensions (HxWxD) (millimeters/inches):	606 x 357 x 404 mm / 23.85" x 14.05" x 15.90"
-Net Weight (kg/Pounds):	21 kg / 46.29 lbs
-Construction:	16mm birch plywood. Finished in black paint. Two recessed carrying handle.
-Grille:	Powder coated perforated steel with acoustically transparent reticulated foam

E15 is a compact 2-way full-range loudspeaker system comprised of one 15-inch low frequency driver and one 1.4-inch exit /35 mm, 3-in /76 mm voice-coil HF compression driver. The CD horn provides 120° by 80° coverage in vertical. The internal passive crossovers custom network minimize band overlap and well-controlled offaxis response. The cabinet is fitted with M10 threaded suspension points and Speakon® NL4 connectors. The enclosure has been made with the latest techniques ensuring a perfect and rigid construction.



- Features:

- * Two-way full range loudspeaker
- * 1 x 15-inch-LF cone driver/ 1 x 1.4-inch exit, 3-inch voice coil compression driver
- * Integrate suspension points and pole mount cup
- * Long-lasting reliability

- Applications:

- * Performing spaces
- * Stand alone system
- * Near-field applications
- * Background music
- * Mobile and fixed installation

-Frequency Response:	45 Hz – 16 kHz ±3dB, measured on axis
-Components:	1×15" LF driver, 1×1.4" HF driver on a CD horn
-Nominal Dispersions:	120°H x 80°V@-6dB points
-Impedance:	8 Ohm
-Axial Sensitivity:	95dB (1w/1m)
-Calculated SPL:	120 dB continuous /126 dB peak
-Power Handling:	400 W AES / 800 W continuous
-Dimensions (HxWxD) (millimeters/inches):	680x452x512 mm / 26.77" x 17.79" x 20.15"
-Net Weight (kg/Pounds):	32 Kg / 70.54 lbs
-Construction:	16mm birch plywood. Finished in black paint. Two recessed carrying handle.
-Grille:	Powder coated perforated steel with acoustically transparent reticulated foam

The IBZA6 is a small trapezoidal compact full-range loudspeaker of studio quality, designed to be used in a wide variety of audio applications as a small sound reinforcement unit. The enclosure design allows for installation very close to walls and ceilings making it an ideal choice for under balcony, column, or wall mounting.

The IBZA6 is a versatile, two-way passive system designed for applications where high output is required from an ultra-compact enclosure. It features a long-excursion, 6½-inch low frequency driver and a 1.25-inch dome tweeter. The combination exhibits a smooth power response resulting in extremely natural voicing. It has been designed for use as stand-alone full-range speaker or together with a passive subwoofer to create a full-range system



- Features
Compact, vented two-way system
1 x 6½-inch-LF/ 1 x dome tweeter

High-output, low profile

- Applications

Background music in restaurant, disco, club.
Gyms, museums and AV spaces
Near-field applications
Retail outlets

-Frequency Response:	82 Hz - 20 kHz ± 3dB, measured on axis
-Components:	1 x 6,5-inch LF driver and 1 x 1.25-inch Tweeter
-Nominal Dispersions:	80°H x 80°V @ 6dB point
-Impedance:	8 Ohm
-Axial Sensitivity (1w/1m):	93 dB
-Calculated SPL:	116 dB continuous / 122 dB peak
-Power Handling:	200 W AES / 400 W continuous
-Dimensions (HxWxD) (millimeters/inches):	330 x 215 x 207 / 13.07" x 8.46" x 8.11"
-NET Weight:	4,5 kg. / 14.10 lbs
-Construction:	16mm birch plywood. Finished in black semi-matt textured Polyurea weatherized coating.
-Grille:	Powder coated perforated steel with acoustically transparent reticulated foam

The IBZA 6 Plus is a very small trapezoidal compact full range loudspeaker of studio quality, designed to be used in a wide variety of audio applications where a small size although very high output SPL is required.

The enclosure design allows for installation very close to walls and ceilings making it an ideal choice for under balcony, column, or wall mounting. The IBZA 6 Plus is a versatile, two-way passive system designed for applications where very high output is required from an ultra-compact enclosure. It features a 6 ½ " low frequency driver and a 1" compression driver attached to a conical horn. The combination exhibits a smooth power response resulting in extremely natural voicing. It can be used with a passive subwoofer



- Features

Passive Ultra-Compact, vented two-way loudspeaker
1 x 6½-inch-LF polyester cone/ 1 x 1-inch compression driver
70° conical directivity

- Applications

Background music in restaurant, disco, club.
Gyms, museums and AV spaces
Near-field applications
Retail outlets

-Frequency Response:	85 Hz - 20 kHz ± 3dB, measured on axis
-Components:	1 x 6,5-inch LF Ferrite driver and 1 x 1-inch Neodym. Ring HF driver
-Nominal Dispersions:	70°H x 70°V @ 6dB point
-Impedance:	8 Ohm
-Axial Sensitivity (1w/1m):	93 dB
-Calculated SPL:	116 dB continuous / 122 dB peak
-Power Handling:	160 W AES / 320 W continuous
-Dimensions (HxWxD) (millimeters/inches):	230 x 211,7 x 223 (mm) / 9.05" x 8.31" x 8.78"
-NET Weight:	5,3 kg. / 14.10 lbs
-Construction:	16mm birch plywood. Finished in black semi-matt textured Polyurea weatherized coating.
-Grille:	Powder coated perforated steel with acoustically transparent reticulated foam

The IBZA6HZ is a trapezoidal compact loudspeaker designed to provide high-quality sound and reliable performance for distributed systems. Housed in a wooden enclosure, the IBZA6HZ is especially suitable for installations involving space limitations and which long distance cables should be used. The exclusive special designed loudspeaker, 6½-inch cone transducer medium impedance, loaded in a vented-bass cabinet delivers a maximum peak SPL of 117 dB and it has a wide operation range of 110Hz to 20kHz with very low distortion, providing an extremely coherent coverage through 70° conical field.



- Features

- Compact two-way passive system
- 6 ½" Full range loudspeaker
- 40 Ω nominal impedance
- Mounting accessories

- Applications

- Background Music in restaurants, club, airports
- Museums and AV Spaces
- Convention centres
- Hotels
- Distibuted, Fill and Bajo Balcony

-Frequency Response:	110 Hz – 20 kHz ±3 dB
-Components:	1 x 6 ½" cone drivers ferrita magnet, direct radiation. Bass-reflex
-Nominal Dispersions:	70°H x 70°V @ 6dB point
-Impedance:	40 Ohm
-Axial Sensitivity (1w/1m):	88 dB
-Calculated SPL:	111 dB continuous / 117 dB peak
-Power Handling:	100 W (AES) / 200 W continuous
-Dimensions (HxWxD) (millimeters/inches):	230 x 211,7 x 223 / 9.05"x 8.31" x 8.78"
-NET Weight:	5,3 kg. / 14.10 lbs
-Construction:	16mm birch plywood. Finished in black semi-matt textured Polyurea weatherized coating.
-Grille:	Powder coated perforated steel with acoustically transparent reticulated foam

Tecnare's iK26 design extends to the point source technology to a smaller version for size- and weight-critical applications.

Its a concentric driver configuration has all the benefits of a coaxial driver, yet none of the disadvantages.

The K-shaped geometry design, features a symmetrical dual 6,5" LF drive arrangement, vented enclosure and a 1,75" diaphragm, 1" HF driver coupled with a rotatable 80° x 60° constant-Q horn designed for very precise, even coverage. This horn design, in conjunction with the concentric driver configuration, delivers the same pattern regardless of orientation.



- Features

- Compact two-way passive system
- Wide pattern coverage broad area
- Rotatable horn
- Mounting accessories

- Applications

- Multi-purpose AV
- Rental, Theater, Retail Spaces
- Convention centres
- House of worship
- Distibuted, Fill and Bajo Balcony

-Frequency Response:	80 Hz – 18 kHz Free Field: 90 Hz – 18 kHz ±3 dB
-Components:	2 x 6 ½" cone drivers + 1 x 1" compression driver. Vented enclosure
-Nominal Dispersions:	80° x 60°
-Impedance:	4 Ohm
-Axial Sensitivity (1w/1m):	88 dB
-Calculated SPL:	111 dB continuous / 117 dB peak
-Power Handling:	450 W (AES) / 900 W continuous
-Dimensions (HxWxD) (millimeters/inches):	466 x 208 x 272 mm/ (18.35" x 8.19" x 10.7") (HxWxD)
-NET Weight:	11,5 kg (25,35 lbs)
-Construction:	16mm birch plywood. Finished in black semi-matt textured Polyurea weatherized coating.
-Grille:	Powder coated perforated steel with acoustically transparent reticulated foam

The IBZA8 is a trapezoidal compact full range loudspeaker, which houses a long excursion 8-inch and high frequency soft-cone paper tweeter. It has a highly extended bass performance for such a small volume, with a well-balanced mid and very smooth and natural high section.

This two-way system is designed for professional applications where hi fi quality is required from a compact enclosure. It has been designed for use as stand-alone full-range speaker or together with a passive sub woofer



- Features

Compact vented two-way loudspeaker
1 x 8-inch-LF/ 1 x soft-cone paper driver tweeter
High-output, high-definition sound from on a compact enclosure

- Applications

Highly intelligible vocal reproduction
Stand alone system
Near-field applications
Background music in restaurant, disco, club.

-Frequency Response: 65 Hz – 18 kHz \pm 4dB, measured on axis
Free Field: 90 Hz – 18 kHz \pm 3 dB

-Components: 1x8" LF driver, 1 paper cone tweeter HF

-Nominal Dispersions: 110°H x 110°V@-6db points

-Impedance: 8 Ohm

-Axial Sensitivity (1w/1m): 94 dB

-Calculated SPL: 117 dB continuous / 123 peak

-Power Handling: 200 W AES / 400 W continuous

-Dimensions (HxWxD) 405 x 254,5 x 254 mm / 15.94" x 10.02" x 10"
(millimeters/inches):

-NET Weight: 8,7 kg / 19.18 lbs

-Construction: 16mm birch plywood. Finished in black semi-matt textured Polyurea weatherized coating.

-Grille: Powder coated perforated steel with acoustically transparent reticulated foam

The IBZA10 is a trapezoidal compact full range loudspeaker, which houses a long excursion 10-inch low frequency driver and high frequency 1-inch compression driver. It has a highly extended bass performance for such a small volume, with a well-balanced mid and high section.

This two-way system is designed for applications where high output is required from a compact enclosure. It has been designed for use as stand-alone full-range speaker or together with a passive sub woofer (E.G. the SW115). The horn can be rotated through 90° in order to swap the horizontal and vertical dispersion patterns.



- Features

- Compact two-way system
- 1 x 10-inch-LF/ 1 x 1-inch HF compression driver
- Integrate suspension points and pole mount cup
- Internal passive crossover network

- Applications

- Portable live sound reinforcement
- Stand alone system
- Fixed Installations
- Main FOH or additional reinforcement

-Frequency Response:	45 Hz – 18 kHz \pm 4dB, measured on axis
-Components:	1 x 10" LF driver, 1 x 1" HF driver on a rotatable exponential horn
-Nominal Dispersions:	70°H x 50°V@-6db points. Rotatable horn allows swap of horizontal and vertical pattern
-Impedance:	8 Ohm
-Axial Sensitivity (1w/1m):	94 dB
-Calculated SPL:	120 dB continuous / 126 dB peak
-Power Handling:	400 W AES / 800 W continuous
-Dimensions (HxWxD) (millimeters/inches):	500x302x320 mm / 19.68" x 11.89" x 12.6"
-NET Weight:	15 Kg / 33.6 lbs
-Construction:	16mm birch plywood. Finished in black semi-matt textured Polyurea weatherized coating.
-Grille:	Powder coated perforated steel with acoustically transparent reticulated foam

The IBZA12 is a trapezoidal full range loudspeaker high performance, wide-bandwidth system in a compact and efficient package. Extended frequency response is provided by a bass reflex tuned 12-inch LF driver and a 1-inch exit compression driver mounted on an asymmetrical rotatable (50° -100°) x 60° HF horn.

This two-way system is designed for applications where very high output is required from a compact enclosure. It has been designed for use as standalone full-range speaker or together with a passive sub woofer (E.G. the SW118M or SW115).



- Features

- Full Range Compact two-way system
- 1 x 12-inch-LF/ 1 x 1-inch exit (1.75-inch coil) HF on rotatable asymmetrical horns

- Integrate suspension point and screw for an external pole mount cup

- Internal passive crossover/filter network

- Portable use or permanent installation

- Applications

- Highly intelligible vocal reproduction

- Stand alone system

- Near-field applications

- Background music

- Mobile and fixed installation

-Frequency Response:	56 Hz – 18 kHz ±4dB, measured on axis
-Components:	1×12" LF driver, 1×1" HF driver on an asymmetric rotatable horn
-Nominal Dispersions:	Asymmetric rotatable (50°-100°) x60° HF horn. @-6db points.
-Impedance:	8 Ohm
-Axial Sensitivity (1w/1m):	96 dB
-Calculated SPL:	124 dB continuous / 130 dB Peak
-Power Handling:	600 W AES / 1200 W continuous
-Dimensions (HxWxD) (millimeters/inches):	606 x 366 x 384,5 mm / 23.85" x 14.40" x 15.14"
-NET Weight:	19 kg / 41.89 lbs
-Construction:	16mm birch plywood. Finished in black semi-matt textured Polyurea weatherized coating.
-Grille:	Powder coated perforated steel with acoustically transparent reticulated foam

The IBZA15 is a trapezoidal full range loudspeaker high performance, wide-bandwidth system in a compact and efficient package. Extended frequency response is provided by a bass reflex tuned 15-inch LF driver and a 1.4-inch exit compression driver (3-inch voice coil) mounted on a 80° x 50° constant directivity HF horn.

This two-way system is designed for applications where very high output is required from a compact enclosure. It has been designed for use as stand-alone full-range speaker or together with a passive sub woofer (E.G. the SW215).



- Features

Two-way full range loudspeaker
1 x 15-inch-LF cone driver/ 1 x 1.4-inch exit, 3-inch voice coil compression driver
Long-lasting reliability
For portable use or permanent installation

- Applications

Theatrical sound reinforcement
Stand alone system
Fill applications
Background music in disco and club.

-Frequency Response:	48 Hz - 18 kHz \pm 4dB, measured on axys
-Components:	1 x 15" LF driver, 1 x 1.4" HF driver on a CD horn
-Nominal Dispersions:	80°H x 50°V@-6db points
-Impedance:	8 Ohm
-Axial Sensitivity (1w/1m):	101 dB
-Calculated SPL:	129 dB continuous /135 dB peak
-Power Handling:	650 W AES / 1300 W continuos
-Dimensions (HxWxD) (millimeters/inches):	640x450x486 mm / 25.6" x 18.11" x 18.98"
-NET Weight:	34,8 Kg / 76.72 lbs
-Construction:	16mm birch plywood. Finished in black semi-matt textured Polyurea weatherized coating.
-Grille:	Powder coated perforated steel with acoustically transparent reticulated foam

The V10 is a lightweight, flexible and multipurpose loudspeaker enclosure, designed for use in mobile or fixed sound reinforcement either as a main PA or as a stage monitor. The design includes a powerful 10-inch (3-inch voice coil) cone transducer tuned into a vented box, and a 1-inch exit/1.75-inch HF compression driver coupled to a rotatable coverage pattern 90°x60° CD horn to provide a smooth and clear high frequency reproduction. The system include an internal passive filter/crossover network.



- Features

Two-way full range loudspeaker
 1 x 10-inch LF cone / 1 x 1-inch exit,
 1.75-inch voice coil compression driver
 Rotatable horn for optimized pattern
 control

- Applications

Highly intelligible vocal reproduction
 Stand alone system
 Dual use main/monitor two-way system
 Corporate events

-Frequency Response:	52 Hz - 20 kHz ±4dB, measured on axys
-Components:	1×10" LF driver, 1×1" HF driver on a rotatable exponential horn
-Nominal Dispersions:	90°H x 60°V@-6db points. Rotatable horn allows swap of horizontal and vertical pattern
-Impedance:	8 Ohm
-Axial Sensitivity (1w/1m):	97dB
-Calculated SPL:	123 dB continuous/ 129 Peak
-Power Handling:	350 W AES. 700 W continuous
-Dimensions (HxWxD) (millimeters/inches):	525x340x290 mm / 20.67" x 13.38" x 11.42"
-NET Weight:	14,4 Kg / 31.75 lbs
-Construction:	16mm birch plywood. Finished in black semi-matt textured Polyurea weatherized coating.
-Grille:	Powder coated perforated steel with acoustically transparent reticulated foam

The V12 is a lightweight, flexible and multipurpose loudspeaker enclosure, designed for use in mobile or fixed sound reinforcement, either as a main PA or as a stage monitor. The design includes a powerful 3-inch voice coil 12-inch LF speaker CAD tuned into a vented box, and a 1.4-inch exit (3-inch voice coil) compression driver coupled to a rotatable asymmetric horn to provide a smooth and clear high frequency reproduction.



- Features

High-Power Multipurpose two-way system
 1 x 12-inch-LF/ 1 x 1.4-inch HF compression drive on CD rotatable asymmetrical horn
 Integrate suspension points and pole mount cup

- Applications

Highly intelligible vocal reproduction
 Stand alone system
 User-adaptable for both PA and stage monitoring applications
 Background music in restaurant, disco, club.

-Frequency Response:	48 Hz - 17 kHz \pm 4dB, measured on axis
-Components:	1 x 12" LF driver, 1 x 1.4" HF driver on an asymmetrical exponential horn
-Nominal Dispersions:	50 to 100°H x 60°V@-6db points. Rotatable horn allows swap of horizontal and vertical pattern
-Impedance:	8 Ohm
-Axial Sensitivity (1w/1m):	100dB
-Calculated SPL:	127 dB continuous/ 133 Peak
-Power Handling:	520 W AES / 1040 W continuous
-Dimensions (HxWxD) (millimeters/inches):	645x390x392 mm / 25.39" x 15.35" x 15.43"
-NET Weight:	24 Kg / 46.29 lbs
-Construction:	16mm birch plywood. Finished in black semi-matt textured Polyurea weatherized coating.
-Grille:	Powder coated perforated steel with acoustically transparent reticulated foam

The V14CX is a two-way, coaxial loudspeaker housing one 14-inch low frequency transducer in a vented-bass cabinet, and a 3-inch diaphragm, 1.4-inch exit, compression driver attached to an exponential horn flare for improved acoustical loading and controlled coverage.

V14CX is designed to support the widest possible range of pro-audio applications, with a high output vocal presence and neutral balanced sound, ideal for stage monitor applications.

The 14-inch coaxial speaker offer an unique combination of low-frequency output better than a 12-inch, but more balanced midrange performance than a 15-inch. It offer incredible SPL in beam-width, excellent vocal reproduction, and very low frequency reproduction from a small enclosure. Its ultra-low profile and low weight make it the perfect choosing in both touring and permanently installations applications.



- Features

- Very high-SPL, compact two-way system
- 1 x 14-inch Coaxial "point source" performance
- Integrate suspension points and pole mount cup
- Visually-appealing, low-profile
- Side panel rubber feet for extra protection
- M8 rigging insert

- Applications

- Stage monitor
- Stand alone system
- FOH Applications for mid-scale
- Downfill, FrontFill or SideFill
- Background music in restaurant, disco, club.

-Frequency Response:	55 Hz - 18 kHz \pm 3dB, measured on axys
-Components:	1 x 14" LF Coaxial cone driver + 1 x 3" voice coil HF driver on exponential horn
-Nominal Dispersions:	40° x 60° - Fix it in wedge monitor configuration
-Impedance:	8 Ohm
-Axial Sensitivity (1w/1m):	101dB
-Calculated SPL:	Bi-amp mode: 125dB SPL - 131dB SPL max / Passive mode: 124dB SPL - 130dB SPL max
-Power Handling:	780 W AES / 1560 W continuous
-Dimensions (HxWxD) (millimeters/inches):	356,5 x 528,7 x 522 mm / 14.03" x 20.81" x 17.55"
-NET Weight:	18 kg / 39.68 lbs
-Construction:	16mm birch plywood. Finished in black semi-matt textured Polyurea weatherized coating.
-Grille:	Powder coated perforated steel with acoustically transparent reticulated foam

The V15 is a lightweight, flexible and multipurpose loudspeaker enclosure, designed for use in mobile or fixed sound reinforcement, either as a main PA or as a stage monitor. The design includes a powerful 3-inch voice coil 15-inch LF speaker CAD tuned into a vented box, and a 1.4-inch exit (3-inch voice coil) HF compression driver coupled to an asymmetrical rotatable horn to provide a flexible coverage patterns and a smooth and clear high frequency reproduction.



- Features

High-Power Multipurpose two-way system
 1 x 15-inch-LF/ 1 x 1.4-inch HF compression drive on CD rotatable asymmetrical horn
 Integrate suspension points and pole mount cup

- Applications

Highly intelligible vocal reproduction
 Stand alone system
 User-adaptable for both PA and stage monitoring applications
 Background music in restaurant, disco, club.

-Frequency Response:	42 Hz - 17 kHz \pm 4dB, measured on axys
-Components:	1 x 15" LF driver, 1 x 1.4" HF driver on an asymmetrical exponential horn
-Nominal Dispersions:	155 to 100° x 60°V@-6db points. Rotatable horn allows swap of horizontal and vertical pattern
-Impedance:	8 Ohm
-Axial Sensitivity (1w/1m):	101 dB
-Calculated SPL:	130 dB continuous/ 136 Peak
-Power Handling:	720 W AES / 1050 W continuous
-Dimensions (HxWxD) (millimeters/inches):	715 x 445 x 395 (mm) 28.15" x 17.5" x 13.34"
-NET Weight:	28,3kg. (62.40lbs.)
-Construction:	16mm birch plywood. Finished in black semi-matt textured Polyurea weatherized coating.
-Grille:	Powder coated perforated steel with acoustically transparent reticulated foam

The full-range passive 2-way loudspeaker KT12 has been specifically designed by Tecna® as an entertainment club system, to reach the best nearfield quality, vocal coherence, and a stable sound pressure level even at high SPL level.

KT12 features a 12" LF cone driver and a 1" copper clad neodymium compression driver for 450W (AES) power handling. A passive Notch filter, selectable from a rear switch, provides different EQ applications.



- Features

- Passive 12" 2-way full range Loudspeaker
- 1.5" VC polymer diaphragm compression driver
- Robust enclosure made from 15mm birch plywood
- Mounting accessories

- Applications

- Karaoke sound reinforcement
- Convention centres
- Bar, club, lounge
- Hotel, restaurant

-Frequency Response:	45 Hz - 18 kHz Free Field: 55 Hz - 17 kHz ±3dB
-Components:	1 x 12-inch cone driver + 1 x 1-inch (1.5" VC) compression driver
-Nominal Dispersions:	70° x 50° (HxV)
-Impedance:	8 Ohm
-Axial Sensitivity (1w/1m):	90 dB
-Calculated SPL:	120 dB cont. / 126 dB peak
-Power Handling:	450W / 900 W
-Dimensions (HxWxD) (millimeters/inches):	600 x 335,5 x 380,1 mm / (23.6" x 13.2" x 15")
-NET Weight:	18,5 kg. / (40.7 lbs)
-Construction:	15mm plywood. Finished in black semi-matt texture
-Grille:	Powder coated perforated steel with acoustically transparent reticulated foam
-Input Conexion:	IN: 1xNL4 SpeakON® LINK: 1xNL4 SpeakON
-Accessories:	U-bracket, polemount socket, truss clamp & protection cover

The KT-18 inherits the features from its older brother SW118M. Its a compact, high-output vented subwoofer, housing a 18-inch loudspeaker.

The KT-18 is the perfect combination to supplement the LF headroom of the Tecna® KT-12 loudspeaker in a variety of combinations. The subwoofer cabinet is constructed with 18mm birch plywood and has a high-quality Poliurea paint finish. The front of the subwoofer is protected by a hex-stamping steel grille covered with an acoustically transparent fabric, and it features a pole mount socket.



• Features

- Passive 18" LF Long excursion 4" voice coil
- Vented cabinet
- Robust enclosure made from 18mm birch plywood
- Top mounted, 35 mm pole mount socket

• Applications

- Karaoke sound reinforcement
- Convention centres
- Bar, club, lounge
- Hotel, restaurant

-Frequency Response:	35 Hz - 250 kHz Free Field: 40 Hz - 100 Hz ±3dB
-Components:	1 x 18-inch LF cone driver 4-inch voice coil
-Nominal Dispersions:	360° (Only one box. Varies with number of units & configuration)
-Impedance:	8 Ohm
-Axial Sensitivity (1w/1m):	97.5 dB
-Calculated SPL:	127.5 dB cont. / 133.5 dB peak
-Power Handling:	1000W AES / 2000 W Continuous
-Dimensions (HxWxD) (millimeters/inches):	596 x 602 x 691 mm / (23.46" x 23.23" x 27.20") (HxWxD)
-NET Weight:	40,2 kg. / (88.62lbs)
-Construction:	18mm birch plywood. Finished in black semi-matt textured Polyurea weatherized coating
-Grille:	Powder coated perforated steel with acoustically transparent reticulated foam
-Input Conexion:	IN: 1xNL4 SpeakON® LINK: 1xNL4 SpeakON
-Accessories:	Optional wooden dolly and soft cover

The exceptional scalability and the ability to form small arrays of two, three or four cabinets with strict control of dispersion makes ALIS 12 capable of adjusting to any audience geometry, being the ideal choice for distributed systems in sports venues. Arrays can be flown horizontally or vertically, or stacked when needed.

ALIS 12 offer unbeatable audio performance for all kind venues, where polar control, high-output, lowdistortion, and the highest quality sound are required. Constructed of premium WISA birch plywood, ALIS 12 enclosure are covered with a hard-shell finish coating. Rigging is made out of aluminum to lower weight and optimize weatherization.



• Features

Exceptional size-to-power ratio; easily powerful enough to use for main system, delay stacks, or fill duties

1 x 12-inch-LF cone driver / 1 x 1.4-inch exit (3-inch voice coil) HF compression driver coupled to a waveguide

Plug-and-play package, quick set-up and easy flying

• Applications

Theatres and theatrical sound reinforcement

Stand alone system

Center and Sidefill applications

Concert Halls, distributed systems and clubs

-Frequency Response:	55 Hz - 20 kHz \pm 4dB, measured on axys
-Components:	1 x 12" neodymium LF driver, 3" voice coil, 1 x 1.4" exit compression driver
-Nominal Dispersions:	20° x 75° @-6dB
-Impedance:	LF: 8 Ohm / HF: 16 Ohm
-Axial Sensitivity (1w/1m):	104dB
-Calculated SPL:	131 dB nominal / 137 dB continuous
-Power Handling:	710 W AES / 1400 W continuos *LF power: 600W AES @8ohm *HF power 110W AES @16ohm
-Dimensions (HxWxD) (millimeters/inches):	654,5 x 388 x 582,6 mm / 25.77" x 15.27" x 22.94"
-NET Weight:	33,5 Kg / 73.85 lbs
-Construction:	16mm birch plywood. Finished in black semi-matt textured Polyurea weatherized coating.
-Grille:	Powder coated perforated steel with acoustically transparent reticulated foam

ALIS15 R2 loudspeaker (second generation) is a 2-way full range, "Adaptative Loudspeaker Integrate point Source" which generates a constant curvature wavefront of 40°x75°. The exceptional scalability and the ability to form small arrays of two, three or four cabinets with strict control of dispersion makes ALIS 15 capable of adjusting to any audience geometry, being the ideal choice for distributed systems. Arrays can be flown horizontally or vertically, or stacked when needed.



• Features

Exceptional size-to-power ratio; easily powerful enough to use for main system, delay stacks, or fill duties

1 x 15-inch-LF cone driver / 1 x 1.4-inch exit (3-inch voice coil) HF compression driver coupled to a constant-Q horn

Plug-and-play package, quick set-up and easy flying

• Applications

Theatres and theatrical sound reinforcement

Stand alone system

Drumfill, Center and Sidefill applications

Concert Halls, distributed systems and clubs

-Frequency Response:	48 Hz - 20 kHz ±4dB, measured on axys
-Components:	1 x 15" neodymium LF driver 4" voice coil, 1 x 1.4 " neodymium HF compression driver
-Nominal Dispersions:	40° x 75° @-6dB
-Impedance:	LF: 8 Ohm / HF: 16 Ohm
-Axial Sensitivity (1w/1m):	107 dB
-Calculated SPL:	134 dB continuous / 140 dB peak
-Power Handling:	1100 W AES / 2200 W continuous *LF power: 1000 W AES @8ohm *HF power: 100 W AES @16ohm
-Dimensions (HxWxD) (millimeters/inches):	800 x 450 x 755,5 mm / 31.49" x 17.71" x 29.74"
-NET Weight:	42 Kg / 92.59 lbs
-Construction:	16mm birch plywood. Finished in black semi-matt textured Polyurea weatherized coating.
-Grille:	Powder coated perforated steel with acoustically transparent reticulated foam



TANIT Series is the perfect choice for any application where intelligibility and sound quality are key.

With a sleek and modern design, the TANIT Series blends seamlessly into any environment, making it ideal for a wide range of applications, from conference rooms and auditoriums to houses of worship and performance venues. Featuring advanced driver technology, the TANIT Series delivers unparalleled sound quality, with rich, full-bodied bass and crystal-clear highs that ensure every word and note is heard with exceptional clarity.

Experience the pinnacle of professional sound reinforcement with the Tanit Series by Tecware Sound Systems. This powerful combo consists of the Tanit Column and Tanit Sub, delivering unmatched audio quality and performance.

The Tanit Column features six 5" MF cone drivers and two 1" HF drivers for precise audience coverage and exceptional speech intelligibility. With a maximum SPL of 134dB, it delivers immersive sound reproduction.

The Tanit Sub, with two 12" drivers, provides deep, impactful bass reinforcement. With a maximum SPL of 137dB, it adds an impressive low-frequency punch to your sound system.

Both components are constructed with first-grade birch plywood for durability, and their sleek design allows for easy integration into any environment. The combo offers flexible mounting options and can be easily connected for enhanced performance.

TANIT Loudspeaker is a hi-Performance 2-way passive arcuate line source column enclosure designed for professional sound reinforcement. TANIT is equipped with six 5" MF cone drivers mounted in a vented enclosure, three above and three below the HF section and two 1" (1.5" voice coil) HF drivers attached to a waveguide and coupled to an exponential horn. The AES power capacity is 1040W at the nominal 6 ohm impedance. The usable system bandwidth is 85Hz to 18kHz. The precise polar pattern of 120°H x 30°V (+5°/-25°) is achieved through the progressive acoustics coupling slightly arcuate ensuring a precise audience coverage, improved sound quality and outstanding speech intelligibility are assured.



- Features

- Visually Discreet
- Lightweight
- Plug & Play package
- Mounting accessories

- Applications

- Theatres and theatrical sound reinforcement
- Concerts & Live Events
- Place of Worship
- Auditoriums & Concert Halls

-Frequency Response:	75 Hz - 20 kHz Free Field 85 Hz - 18 kHz ±3 dB
-Components:	6 x 5" custom made neodymium cone drivers and 2 x 1" neodymium compression drivers
-Nominal Dispersions:	Asymmetric 120° x 30° (+5°/-25°)
-Impedance:	6 Ohm
-Axial Sensitivity (1w/1m):	98 dB
-Calculated SPL:	134 dB continuous / 140 dB peak
-Power Handling:	1040 W AES / 2080W continuous
-Dimensions (HxWxD) (millimeters/inches):	1274,5 x 165,5 x 230,3 mm (50.18" x 6.40" x 9.07")
-NET Weight:	23 kg (50.7 lbs)
-Construction:	10mm first grade birch plywood. Finished in black semi-matt textured Polyurea coating
-Grille:	Powder coated perforated steel with acoustically transparent reticulated foam.

The TANIT SUB is a passive/active high-power vented subwoofer housed with two 12" drivers in a compact enclosure designed to work altogether with TANIT Line Source Column.

The subwoofer is connected via 4-points speakON® connector. The Powering mode can be switched for passive operation using the internal passive crossover network or active through a dedicate preset. Selfpowered version is also available.

Tanit Sub feature Autoconnect panel on top for stacking and connecting the companion TANIT Line Source Column enclosure. The AES power capacity is 1800W at the nominal 8 ohms impedance. The low frequency limit is 35 Hz.



- Features

- Visually Discreet
- Lightweight
- Plug & Play package
- Mounting accessories

- Applications

- Theatres and theatrical sound reinforcement
- Concerts & Live Events
- Place of Worship
- Auditoriums & Concert Halls

-Frequency Response:	35 Hz- 195 Hz Free Field 45Hz- 120 Hz±3 dB
-Components:	2 x 12" neodiumium cone drivers
-Nominal Dispersions:	360°
-Impedance:	8 Ohm
-Axial Sensitivity (1w/1m):	96dB @half-space
-Calculated SPL:	131 dB continuous / 137 dB peak
-Power Handling:	1800 W AES / 3600 W continuous
-Dimensions (HxWxD) (millimeters/inches):	825 x 348 x 423,3 mm (32,48" x 13,71" x 16,67")
-NET Weight:	31,5 kg (69,44 lbs)
-Construction:	16mm first grade birch plywood. Finished in black semi-matt textured Polyurea coating
-Grille:	Powder coated perforated steel with acoustically transparent reticulated foam.

The Tecnaire CLA208 array is an extremely compact high output, lightweight enclosure housing two 8-inches speakers, and one 1.4-inches compression driver attached to a waveguide device. The CLA208 Array delivers extended bass response and well balanced clean mids and highs. High frequency is handled by one 3-inches voice coil, 1.4-inches exit compression driver attached to a 110°x10° wave guide. The system's shape is trapezoidal, so we can better angle and focus it's elements.



• Features

Ultra-Compact two-way curvilinear array module
2 x 8-inch-LF cone, dipolar shape /
1 x 1.4-inch (3-inch voice coil) mounted on one waveguide
Exceptional pattern control due to symmetrical design.

• Applications

Theater
Touring sound, sports arenas
Near-field applications
hotel ballrooms live clubs and disco
corporate A/V, performing arts centers

- Frequency Response: 62/80 (1) Hz – 18 kHz \pm 4dB (1 box)
- Components: Low 2x8"; High 1x1.4" exit compression driver
- Nominal Dispersions: Horizontal: 110°; Vertical: depending on array length and configuration
- Impedance: LF: 8 Ohm / HF: 16 Ohm
- Axial Sensitivity: 107 dB (1w/1m)
- Calculated SPL: 134 dB continuous / 140 peak
- Power Handling: 510 W AES / 1020 W continuous
 - * LF power: 400W AES / 800 W continuous @8ohm
 - * HF power: 110W AES / 220 continuous @16ohm
- Dimensions (HxWxD)
(millimeters/inches): 295,5x602x455 mm / 11.63" x 23.70" x 17.91"
- Net Weight (kg/Pounds): 29,3 Kg / 77.16 lbs
- Construction: 16mm birch plywood. Finished in black semi-matt textured Durawound weatherized coating. One recessed carrying handle.
- Grille: Powder coated perforated steel with acoustically transparent reticulated foam

The CLA21 is a high-power, bi-amp 2-way, line array module engineered to deliver an incredible output for use in both indoor or outdoor. First of all we have established a design criterion in which the size of the cabinet is extremely compact. The bass and mid section are conformed by two 10" dipolar mounted drivers and High frequency is handled by a 1.4" exit (3-inch voice coil) compression driver attached to a pattern controlled (75° horizontal x 13° vertical) symmetrical curved waveguide. The advanced bass-reflex and port arrangement delivers full bandwidth capabilities with an extended LF output. Due to the dipolar arrangement of the LF drivers, a broadband, horizontal dispersion control nominally is maintained down to approximately 500 Hz.



- Features

High output to size ratio
 2 x 10-inch-LF cone, dipolar shape, vented box/ 1 x 1.4-inch exit (3-inch voice coil) HF compression driver mounted on one waveguid attached a CD Horn
 Exceptional pattern control due to symmetrical design

- Applications

Theater
 Touring sound, sports arenas
 Near-field applications
 hotel ballrooms live clubs and disco
 corporate AVV, performing arts centers

- Frequency Response: 60/80(1) Hz- 18 Khz
- Components: Low and mid: 2 x 10", 3" voice coil; HF: 1 x 1.4" compression driver, 3" voice coil
- Nominal Dispersions: Horizontal: 75°; Vertical: depending on array length and configuration
- Impedance: LF: 8 Ohm / HF: 16 Ohm
- Axial Sensitivity: 108 dB (1w/1m)
- Calculated SPL: 136 dB continuous / 142 peak
- Power Handling: 710 W AES / 1420 W continuous
 - * LF power: 600W AES / 1200 W continuous @8ohm
 - * HF power: 110W AES / 220 continuous @16ohm
- Dimensions (HxWxD) (millimeters/inches): 320x741x479mm / 12.6" x 29.7" x 18.85"
- Net Weight (kg/Pounds): 35 Kg / 77.16 lbs
- Construction: 16mm birch plywood. Finished in black semi-matt textured Durawound weatherized coating. One recessed carrying handle.
- Grille: Powder coated perforated steel with acoustically transparent reticulated foam

The Tecnaire Cla21Plus is the first of a new family of line source modules which incorporates a new unique technology that seamlessly integrates MF and HF components into a single horn which produces a coherent wavefront without interruptions.

At the heart of the Cla21Plus line source module is a new coaxial 4-in voice coil mid-frequency and 2.5-in voice coil high-frequency driver, and covering the 400Hz to 20kHz range. It is loaded to a waveguide and a proprietary horn that ensures low distortion and controlled broadband directivity. With extended frequency response down to 55 Hz, the Cla21Plus LF section houses two 10-in dipolar mounted, high-excursion drive units, 3-in voice coils to maintain long throw projection of low frequencies.



• Features

- Compact three-way, bi-amp cabinet
- 2 x 10" LF lightweight neodymium motors
- 1 x 1.4" coaxial mid-high compression Driver
- Easy proprietary rigging systems
- 8Ω LF and 16Ω MF/HF Nominal Impedance

• Applications

- Theaters, arenas, Stadiums
- Dance clubs
- Medium size festivals
- Fill and integration with Cla208

-Frequency Response:	55 Hz – 20 kHz Free Field: 60 Hz/80 – 18 kHz ±3 dB
-Sensitivity (1W/1m)	110 dBspl
-Calculated SPL	141 dBspl continuous / 147 dBspl peak
-Transducers:	2 x 10" LF cone drivers + 1 x 1.4" exit, coax 4" VC MF & 2.5 mm VC HF driver on waveguide device.
-Dispersions (HxV)	75° x 13° (Only one box. Vertical varies with array length and configuration)
-Recommended Amplifiers	PA3000/PA5000/T20-44/T10-44/T20-48/T10-48
-Power Handling:	AES: 1000 W LF / 180 W MF-HF Continuous: 2000 W LF / 360 W MF-HF
-Impedance:	8 Ω LF – 16 Ω MF/HF
-Input Connectors:	IN: 1xNL4 SpeakON® LINK: 1 x NL4 SpeakON®
-NET Weight:	39,5 kg (87.08 lbs)
-Dimensions:	767 x 580 x 320mm (30.2" x 22.84" x 12.60")(WxDxH)
-Construction:	16mm birch plywood. Finished in black semi-matt textured Polyurea weatherized coating.
-Grille:	Powder coated perforated steel with acoustically transparent reticulated foam

Tecnaire CLA312 Line Array model is a versatile and powerful audio system designed to deliver exceptional performance. It features a low-profile folded horn design for precise sound projection control and addresses common bass issues on stage. The combination of multiple enclosure outputs extends the low-frequency response. For mid frequencies, it utilizes a high-output 12" neodymium loudspeaker with a phase corrector device to ensure even dispersion. High frequencies are handled by two 1.4" compression drivers attached to a controlled waveguide and non-resonant horn.



- Features

High-Power 3-way tri-amp enclosure
 2 x 12-inch-LF cone Horn-Loaded /
 1 x 12-inch MF cone Horn-Loaded /
 2 x 1.4-inch exit HF both waveguide
 attached CD horn
 Exceptional pattern control due to symmetrical design and large horn(s)

- Applications

Theater
 Touring sound, sports arenas
 Large-scale touring sound reinforcement for outdoor festivals, stadia, arenas and concert halls
 Premium fixed installations

- Frequency Response: 58 Hz - 19 kHz \pm 4dB, measured on axys.
42 Hz - 19 kHz \pm 4dB (6 element array)
- Components: Low: 2x12" LF driver band pass horn loaded. Mid: 1x2" HF phase corrected
High: 2x1.4" compression driver attached to proprietary waveguide device
- Nominal Dispersions: 90°H x 8°V@-6dB points (one box)
- Impedance: LF: 4 Ohm / MF: 8 Ohm / HF: 8 Ohm
- Axial Sensitivity: 105 dB (1w/1m)
- Calculated SPL: 138 dB continuous/ 144 dB Peak
- Power Handling: 2520 W AES / 5040 W continuous
 *LF: 1800W AES @8ohm
 *MF: 600W AES @8ohm
 *HF: 240W AES @8ohm
- Dimensions (HxWxD)
(millimeters/inches): 440 (front height) - 310 (rear height) x 1245x740 mm
- Net Weight (kg/Pounds): 85 Kg (187,39 lbs)
- Construction: 16mm birch plywood. Finished in black semi-matt textured Durawound weatherized coating. One recessed carrying handle.
- Grille: Powder coated perforated steel

The Tecnore SW12 Minisub is a very powerful 1 x 12-inch Low-Frequency loudspeaker enclosure. This vented subwoofer cabinet has been designed for small sound reinforcements, where box size matters. It consists of a 12-inch reflex-loaded low frequency driver in a birch plywood enclosure, optimally tuned for extended low frequency response.



- Features

Sonic impact precision. High output, compact subwoofer system

1 x 12-inch-LF Bass Reflex

Designed for permanent installation where the physically small size and the impact of a 12-inch driver is desired

- Applications

A/V systems

meeting rooms, classrooms, exhibit areas

f/x reinforcement, cruise ships

Background music in restaurant, disco, club and small retail spaces

-Frequency Response:	38 Hz - 500 Hz \pm 4dB, measured on axis
-Components:	1 x 12" LF driver
-Nominal Dispersions:	360° (Only one box. Varies with number of units & configuration)
-Impedance:	8 Ohm
-Axial Sensitivity (1w/1m):	93 dB
-Calculated SPL:	122 dB continuous / 128 dB peak
-Power Handling:	700 W AES / 1400 W continuous
-Dimensions (HxWxD) (millimeters/inches):	376x376x398 mm / 14.80" x 14.80" x 15.70"
-NET Weight:	21,1 Kg / 46.51 lbs
-Construction:	18mm birch plywood. Finished in black semi-matt textured Polyurea weatherized coating
-Grille:	Powder coated perforated steel with acoustically transparent reticulated foam

The SW115 is a very powerful band pass rear horn-loaded subwoofer designed for use in night-club applications, although it is also ideally suited for concert touring and festivals. High-velocity band pass horn-loading technique, gives a precise cone control, resulting in a deep and fast bass response at high power levels, with a very high sensitivity. The response given with this subwoofer is very deep, starting at 38 Hz, but at the same time it delivers tremendous punch due to its fast transient response.



- Features

High output, compact subwoofer system
1 x 15-inch-LF
Designed for permanent installation where the physically small size and the impact of a 15 inch driver is desired

- Applications

Restaurant, disco and club sound reinforcement
Theater Sound Systems
Meeting rooms, classrooms, exhibit areas
Medium Scale systems

-Frequency Response:	38 Hz - 150 Hz \pm 4dB, measured on axis
-Components:	1 x 15" LF driver
-Nominal Dispersions:	120° x 120°
-Impedance:	8 Ohm
-Axial Sensitivity (1w/1m):	99 dB
-Calculated SPL:	129 dB continuous / 135 dB peak
-Power Handling:	1000 W AES / 2000 W continuous
-Dimensions (HxWxD) (millimeters/inches):	735x445x690mm / 28.93" x 15.52" x 27.16"
-NET Weight:	43,2 Kg / 95.24 lbs
-Construction:	18mm birch plywood. Finished in black semi-matt textured Durawound weatherized coating. Six recessed carrying handle.
-Grille:	Powder coated perforated steel with acoustically transparent reticulated foam

The SW-118H is a folded horn-loaded subwoofer designed for use in disco applications (night-clubs and portable), although it is also ideally suited for installations, mobile DJs and club applications. A high-velocity horn loading technique, gives a precise cone control, resulting in a deep and fast bass response at high-power levels, with a very high sensitivity. The response given with this subwoofer is very deep, starting at 40 Hz, but at the same time it delivers tremendous impact due its fast transient response.



- Features

- Ultra-Compact two-way system
- 1 x 18-inch-LF cone driver (3-inch voice coil)/ Horn-Loaded
- Maximum low frequency output & sensitivity

- Applications

- Dance-clubs/discotheques
- Theatrical sound design
- Auditoriums
- Live clubs

-Frequency Response:	40 Hz - 400 Hz \pm 4dB, measured on axis
-Components:	1 x 18" LF driver
-Nominal Dispersions:	150° x 150°
-Impedance:	8 Ohm
-Axial Sensitivity (1w/1m):	100 dB
-Calculated SPL:	130 dB continuous / 136 dB peak
-Power Handling:	1200 W AES / 2400 W continuous
-Dimensions (HxWxD) (millimeters/inches):	1020x520x920 mm / 40.16" x 20.47" x 36.22"
-NET Weight:	70,8 Kg / 156.09 lbs
-Construction:	18mm birch plywood. Finished in black semi-matt textured Durawound weatherized coating. One recessed carrying handle.
-Grille:	Powder coated perforated steel

The Tecnaire SW118M is a powerful 1×18-inch direct radiation, vented subwoofer cabinet. It has been designed for all kinds of sound reinforcement: short, medium or long throw. Optionally, the box can houses rigging hardware to be used in array systems, such as CLa208.

The enclosure has been made with the latest CAD techniques assuring a perfect and rigid construction. Weatherized finish is provided, as the cabinet is covered with Poliurea texture finish and protected with epoxy powder coating grills.



• Features

The SW118M is the companion subwoofer to the CLa208. The SW-118M's simple-to-use rigging solution allows users to construct flown and ground stacked arrays with ease

- 1 x 18-inch-LF cone driver
- Optimally vented for increased response

• Applications

- Band PA
- Corporate Events
- Sound system rental
- Mobile and fixed DJ systems

-Frequency Response:	35 Hz - 400 Hz \pm 4dB, measured on axis
-Components:	1×18" LF driver
-Nominal Dispersions:	360°
-Impedance:	8 Ohm
-Axial Sensitivity (1w/1m):	98 dB
-Calculated SPL:	129 dB continuous/ 135 Peak
-Power Handling:	1200 W AES / 2400 W continuous
-Dimensions (HxWxD) (millimeters/inches):	596x590x691 mm / 23.46" x 23.23" x 27.20"
-NET Weight:	46 Kg / 101.41 lbs
-Construction:	18mm birch plywood. Finished in black semi-matt textured Poliurea weatherized coating. Four recessed carrying handle.
-Grille:	Powder coated perforated steel with acoustically transparent reticulated fabric

The Tecnaire SW18VR is an advanced very compact high power Bass enclosure that can be stacked or flown together in array configuration with CLa21 Line Source. The SW18VR loudspeaker is housed with one 18-inch long excursion transducer in hybrid configuration, designed to reproduce a clean "punchy" low frequency response. This high efficiency design delivers extremely low distortion, coherent bass output from 48 Hz to 200Hz with a max SPL of 138 dB SPL (12dB crest factor pink noise at 1m) and a power handling of 2400 W watts continuous. The impedance is nominal 8 ohms.



- Features

- High output bass system
- 1 x 18-inch-LF cone driver, Hybrid Horn/ Reflex loaded
- Optimally vented for increased response

- Applications

- Concert Hall
- Stadium, arenas, theatres and Auditorium
- Club sound reinforcement
- Suitable for flown or ground stacked used

-Frequency Response:	48 Hz - 200 Hz
-Components:	1 x 18" Long Excursion Woofer
-Nominal Dispersions:	360°
-Impedance:	8 Ohm
-Axial Sensitivity (1w/1m):	101 dB
-Calculated SPL:	132 dB continuous / 138 dB peak
-Power Handling:	1200 W AES / 2400 W continuous
-Dimensions (HxWxD) (millimeters/inches):	513x699x780 mm / 20.19" x 27.52" x 30.71"
-NET Weight:	67 Kg / 147.71 lbs
-Construction:	18mm birch plywood. Finished in black semi-matt textured Durawound weatherized coating. Two recessed carrying handle.
-Grille:	Powder coated perforated steel with acoustically transparent reticulated fabric

The SW215 is a very powerful band pass rear horn-loaded subwoofer designed for use in large nightclub applications, although it is also ideally suited to concert touring and festivals. A high-velocity band pass horn-loading technique, gives precise cone control, resulting in a deep and fast bass response at high power levels, with a very high sensitivity. The response given with this subwoofer is very deep, starting at 36 Hz, but at the same time it delivers tremendous punch due its fast transient response.



• Features

High output, compact subwoofer system
2 x 15-inch-LF
Designed for permanent installation where the small size allows placement in tight places while providing the extremely low frequency response of much larger systems

• Applications

Large Disco and club sound reinforcement
Theater Sound Systems
Large auditoriums
f/x reinforcement and cinemas

-Frequency Response:	36 Hz - 400 Hz \pm 4dB, measured on axis
-Components:	2x15" LF driver
-Nominal Dispersions:	120° x 120°
-Impedance:	4 Ohm
-Axial Sensitivity (1w/1m):	105 dB
-Calculated SPL:	138 dB continuous /144 dB peak
-Power Handling:	2000 W AES / 4000 W continuous
-Dimensions (HxWxD) (millimeters/inches):	735x870x690 mm / 28.94" x 34.25" x 27.16"
-NET Weight:	75,3 Kg / 166 lbs
-Construction:	18mm birch plywood. Finished in black semi-matt textured Durawound weatherized coating. Six recessed carrying handle
-Grille:	Powder coated perforated steel

The Tecnaire SW218V is a very powerful double 2 x 18-inch hybrid subwoofer cabinet. It has been designed for medium to long throw sound reinforcements. The response given with this subwoofer is very deep, starting at 38 Hz. It delivers a tight punch combined with a low deep response.

The acoustic loading of the Speakers, perfectly matched, prevents cones to over run maximum cone displacement. It is the perfect solution for all kind of touring systems. Castors can be supplied as an accessory.



• Features

High temperature 4-inch voice coil drivers
2 x 18-inch-LF cone driver
High-output and high-definition sound

• Applications

Medium / Large scale touring/festival systems
Club sound reinforcement
Sound system rental
Mobile and fixed DJs systems

-Frequency Response:	38 Hz - 280 Hz \pm 4dB, measured on axis
-Components:	2x18" LF driver
-Nominal Dispersions:	180°
-Impedance:	4 Ohm
-Axial Sensitivity (1w/1m):	104 dB
-Calculated SPL:	137 dB continuous /143 dB peak
-Power Handling:	2400 W AES / 4800 W continuous
-Dimensions (HxWxD) (millimeters/inches):	1086x580x841 mm / 42.76" x 22.83" x 33.11"
-NET Weight:	85,5 kg / 188.49 lbs
-Construction:	18mm birch plywood. Finished in black semi-matt textured Durawound weatherized coating. Six recessed carrying handle
-Grille:	Powder coated perforated steel

SW218EB 2600

Subwoofer Series

The SW218EB2600 is a high performance loudspeaker defined by its exceptional headroom and an extended frequency response.

The SW218EB2600 housing two linear, high excursion 18-inch cone drivers mounted in a vented cabinet and optimally tuned port with flared ends to reduce turbulence and noise under high drive conditions. The loudspeaker's 30Hz to 150Hz operating frequency range allow it to integrate with any Tecna Loudspeaker System.



• Features

High output Subwoofer
2 x 18" LF long excursion Hi Power drive
Bass reflex system
140 dB max SPL
4Ω Nominal Impedance

• Applications

Stadium
Club sound reinforcement
Sound system rental
Arenas

-Frequency Response:	30 Hz - 150 kHz
-Components:	2 x 18-inch LF cone driver (4.5" VC)
-Nominal Dispersions:	360° (Only one box. Varies with number of units and configuration)
-Impedance:	4 Ohm
-Axial Sensitivity (1w/1m):	101 dB
-Calculated SPL:	138 dB cont. / 144 dB peak (With T20-44 amplifier)
-Power Handling:	2600W AES / 5200W continuous
-Dimensions (HxWxD) (millimeters/inches):	546x1340x700 mm / 22.10" x 52.75" x 27.56"
-NET Weight:	93,5 kg / (199 lbs)
-Construction:	18mm birch plywood. Finished in black semi-matt textured Durawound weatherized coating. Two recessed carrying handle
-Grille:	Powder coated perforated steel

The SW218EB is a high performance loudspeaker defined by its exceptional headroom and an Extended frequency response.

The SW218EB housing two linear, high-excursion 18-inch cone drivers mounted in a vented cabinet and optimally tuned port with flared ends to reduce turbulence and noise under high drive conditions. The loudspeaker's 28Hz to 100Hz operating frequency range allow it to integrate with any Tecnaire Loudspeaker System. When the SW218EB operate in infrasub mode others Tecnaire subwoofers can be used to extend up the frequency response.



- Features

- High temperature 4-inch voice coil drivers
- 2 x 18-inch-LF cone driver
- High-output and high-definition sound

- Applications

- Stadium
- Club sound reinforcement
- Sound system rental
- Arenas

-Frequency Response:	28 Hz - 100 Hz \pm 3dB, measured on axis
-Components:	Low 2x18" LF driver
-Nominal Dispersions:	Standard or Cardioid
-Impedance:	4 Ohm
-Axial Sensitivity (1w/1m):	103 dB
-Calculated SPL:	137 dB continuous /143 dB peak (T-20 Amplifier)
-Power Handling:	3400 W AES / 6800 W continuous
-Dimensions (HxWxD) (millimeters/inches):	546x1340x700 mm / 22.10" x 52.75" x 27.56"
-NET Weight:	90 kg / 198,41 lbs
-Construction:	18mm birch plywood. Finished in black semi-matt textured Durawound weatherized coating. Two recessed carrying handle
-Grille:	Powder coated perforated steel

It is a driven 1-way bass-reflex design to extends the frequency response down to 27 Hz. It has two bass-reflex chambers designed around two 21-inch/4.5-inch voice coil high spec dual voice coil drive units and ultra-wide ports that drastically reduce low-frequency turbulence to deliver exceptional low frequency performance.

The SW221 is designed to streamline setup a deliver maximum result in minimum time uniting features unique to deliver solutions for rental and installations systems.



- Features

- High temperature 4.5-inch voice coil drivers
- 2 x 21-inch-LF cone driver
- High-output and high-definition sound

- Applications

- Stadium
- Infra extension for High-End night club
- Sound System Rental
- Arenas

-Frequency Response:	27 Hz – 90 Hz, Free Field: 30Hz-100Hz \pm 3dB, measured on axis
-Components:	Low 2x21" LF driver
-Nominal Dispersions:	Standard or Cardioid
-Impedance:	4 Ohm
-Axial Sensitivity (1w/1m):	104 dB
-Calculated SPL:	138 dB continuous /144 dB peak (T-20 Amplifier)
-Power Handling:	3400 W AES / 6800 W continuous
-Dimensions (HxWxD) (millimeters/inches):	1404x835x616 mm / 55.27"x32.87"x24.25"
-NET Weight:	125 kg / 275,578 lbs
-Construction:	18mm birch plywood. Finished in black semi-matt textured Durawound weatherized coating. Two recessed carrying handle
-Grille:	Powder coated perforated steel

The 44TDAP DSP amplifier systems integrate light-weight power supplies, high power sonically transparent class-D amplifiers, complete system monitoring and a fully featured ETHERNET network controlled 32 bit / 48kHz DSP processing platform, handled by the front panel dual RJ45 connectors, as standard.

The advanced 48kHz DSP is fully integrated into the product and provides an amount of useful features. Its powerful Limiter suite provides Peak and RMS limiting, as well as multi-band limiting for passive 2-way enclosures. Many convenient features are provided as Gain, delay, EQ and a powerful FIR filtering with 512 taps, bringing linear phase response to the Tecnore presets.



- 4 Channels
- 4 x 750 @ 4 ohms
- 2 x 1500 @ 8 ohms bridge
- 4 x 450 @ 8 ohms
- 4 x 1300 @ 2 ohm
- 2 x 2600 @ 4 ohm bridge

-Crest Factor of 7.8 (18dB), 2-Ω nominal load:	1.300W
-Crest Factor of 4.8 (14dB), 4-Ohm nominal load:	750W
-Crest Factor of 2.8 (9dB), 8-Ohm nominal load:	450W
-Bridged, per channel pair, 4 Ohm load:	2.600W
-Bridged, per channel pair, 8 Ohm load:	1.500W
-RMS Voltage:	72.1V
-Number of input channels:	4
-Max ambient temperature (full power, no limiting):	45degC (113degF)
-Amplifier modulation scheme:	Proprietary Multi-Loop control technology architecture - Class D
-Dynamic range (analog input to speaker output):	>100dBA typ (20Hz - 20kHz, 8Ω)
-Frequency response:	±0.2dB (10% Rate Power, 20Hz-20kHz, 8Ω)
-Total harmonic distortion, THD+N:	Typical: 0.05% (10% Rated Power, 1kHz, 8Ω)
-Damping factor (Ref 8 Ohms):	81000(20Hz-200Hz)
-Maximum analog input level:	+21dBu (8.7Vrms)
-Analog input sensitivity Rated output Power, 1kHz:	0dBu to +21dBu, continuously adjustable
-Analog input impedance:	20k Ohm, electronically balanced
-Analog ground scheme:	AES48 standard compliant
-Sample rate:	48kHz
-Class leading limiter suite:	RMS & Peak limiter setting and Multiband compressor on each output
-Crossover Filters:	Butterworth: 12dB/Oct, 18dB/Oct, 24dB/Oct, 36dB/Oct, 48dB/Oct Bessel: 12dB/Oct, 24dB/Oct, 48db/Oct Linkwitz-Riley: 12dB/Oct, 24dB/Oct, 48dB/Oct
-Enclosure:	Standard 19"/ 1HU (45mm) and optional rear support system
-Net Weight:	8,3kg. / 9.37lbs

The 44TDAP DSP amplifier systems integrate light-weight power supplies, high power sonically transparent class-D amplifiers, complete system monitoring and a fully featured ETHERNET network controlled 32 bit / 48kHz DSP processing platform, handled by the front panel dual RJ45 connectors, as standard.

The advanced 48kHz DSP is fully integrated into the product and provides an amount of useful features. Its powerful Limiter suite provides Peak and RMS limiting, as well as multi-band limiting for passive 2-way enclosures. Many convenient features are provided as Gain, delay, EQ and a powerful FIR filtering with 512 taps, bringing linear phase response to the Tecnares presets.



- 4 Channels
- 4 x 1700 @ 4 ohm
- 2 x 3400 @ 8 ohms bridge
- 4 x 1000 @ 8 ohms
- 4 x 3000 @ 2 ohm
- 2 x 6000 @ 4 ohm bridge

-Crest Factor of 7.8 (18dB), 2-Ω nominal load:	3.000W
-Crest Factor of 4.8 (14dB), 4-Ohm nominal load:	1.700W
-Crest Factor of 2.8 (9dB), 8-Ohm nominal load:	1.000W
-Bridged, per channel pair, 4 Ohm load:	6.000W
-Bridged, per channel pair, 8 Ohm load:	3.400W
-RMS Voltage:	109.5V
-Number of input channels:	4
-Max ambient temperature (full power, no limiting):	45degC (113degF)
-Amplifier modulation scheme:	Proprietary Multi-Loop control technology architecture – Class D
-Dynamic range (analog input to speaker output):	>100dBa typ (20Hz – 20kHz, 8Ω)
-Frequency response:	±0.2dB (10% Rate Power, 20Hz-20kHz, 8Ω)
-Total harmonic distortion, THD+N:	Typical: 0.05% (10% Rated Power, 1kHz, 8Ω)
-Damping factor (Ref 8 Ohms):	81000(20Hz-200Hz)
-Maximum analog input level:	+21 dBu (8.7Vrms)
-Analog input sensitivity Rated output Power, 1kHz:	0dBu to +21 dBu, continuously adjustable
-Analog input impedance:	20k Ohm, electronically balanced
-Analog ground scheme:	AES48 standard compliant
-Sample rate:	48kHz
-Class leading limiter suite:	RMS & Peak limiter setting and Multiband compressor on each output
-Crossover Filters:	Butterworth: 12dB/Oct, 18dB/Oct, 24dB/Oct, 36dB/Oct, 48dB/Oct Bessel: 12dB/Oct, 24dB/Oct, 48db/Oct Linkwitz-Riley: 12dB/Oct, 24dB/Oct, 48dB/Oct
-Enclosure:	Standard 19" / 1HU (45mm) and optional rear support system
-Net Weight:	9.4kg / 10.8lbs

The 44TDAP DSP amplifier systems integrate light-weight power supplies, high power sonically transparent class-D amplifiers, complete system monitoring and a fully featured ETHERNET network controlled 32 bit / 48kHz DSP processing platform, handled by the front panel dual RJ45 connectors, as standard.

The advanced 48kHz DSP is fully integrated into the product and provides an amount of useful features. Its powerful Limiter suite provides Peak and RMS limiting, as well as multi-band limiting for passive 2-way enclosures. Many convenient features are provided as Gain, delay, EQ and a powerful FIR filtering with 512 taps, bringing linear phase response to the Tecnore presets.



- 4 Channels
- 4 x 3400 @ 4 ohm
- 2 x 7000 @ 8 ohms bridge
- 4 x 2000 @ 8 ohms
- 4 x 5000 @ 2 ohm
- 2 x 9600 @ 4 ohm bridge

-Crest Factor of 7.8 (18dB), 2-Ω nominal load:	5.000W
-Crest Factor of 4.8 (14dB), 4-Ohm nominal load:	3.400W
-Crest Factor of 2.8 (9dB), 8-Ohm nominal load:	2.000W
-Bridged, per channel pair, 4 Ohm load:	9.600W
-Bridged, per channel pair, 8 Ohm load:	7.000W
-RMS Voltage:	126.5V
-Number of input channels:	4
-Max ambient temperature (full power, no limiting):	45degC (113degF)
-Amplifier modulation scheme:	Proprietary Multi-Loop control technology architecture - Class D
-Dynamic range (analog input to speaker output):	>100dBA typ (20Hz - 20kHz, 8Ω)
-Frequency response:	±0.2dB (10% Rate Power, 20Hz-20kHz, 8Ω)
-Total harmonic distortion, THD+N:	Typical: 0.05% (10% Rated Power, 1kHz, 8Ω)
-Damping factor (Ref 8 Ohms):	81000(20Hz-200Hz)
-Maximum analog input level:	+21dBu (8.7Vrms)
-Analog input sensitivity Rated output Power, 1kHz:	0dBu to +21dBu, continuously adjustable
-Analog input impedance:	20k Ohm, electronically balanced
-Analog ground scheme:	AES48 standard compliant
-Sample rate:	48kHz
-Class leading limiter suite:	RMS & Peak limiter setting and Multiband compressor on each output
-Crossover Filters:	Butterworth: 12dB/Oct, 18dB/Oct, 24dB/Oct, 36dB/Oct, 48dB/Oct Bessel: 12dB/Oct, 24dB/Oct, 48db/Oct Linkwitz-Riley: 12dB/Oct, 24dB/Oct, 48dB/Oct
-Enclosure:	Standard 19"/ 1HU (45mm) and optional rear support system
-Net Weight:	12,45kg. / 11,24lbs

TDA Series amplifiers from Tecnore are engineered to deliver exceptional performance and reliability for professional audio applications. These amplifiers are built to last, with high-quality components that ensure maximum durability and long-lasting performance. TDA Series amplifiers feature two channels and offer exceptional sound quality. The TDA1.3 is a compact amplifier that delivers 300W RMS per channel at 8 ohms, 450W RMS per channel at 4 ohms, and 700W RMS per channel at 2 ohms. The TDA3.6 is a versatile amplifier that delivers 800W RMS per channel at 8 ohms, 1200W RMS per channel at 4 ohms, and 1800W RMS per channel at 2 ohms. The TDA4.8 is a powerful amplifier that delivers 1200W RMS per channel at 8 ohms, 2400W RMS per channel at 4 ohms, and 4800W RMS per channel at 2 ohms.



- 2 Channels
- At 2 ohms: 700 W per channel
- At 4 ohms: 450 W per channel
- At 8 ohms: 300 W per channel

-Crest Factor of 7.8 (18dB), 2-Ω nominal load:	700w
-Crest Factor of 4.8 (14dB),4-Ohm nominal load:	450w
-Crest Factor of 2.8 (9dB),8-Ohm nominal load:	300w
-Bridged, per channel pair, 4 Ohm load:	1.300w
-Bridged, per channel pair, 8 Ohm load:	900w
-RMS Voltage:	49.0V
-Number of input channels:	2
-Input types:	2 x Analogue + 2 x link
-Max ambient temperature (full power, no limiting):	45degC (113degF)
-Amplifier modulation scheme:	Proprietary Multi-Loop control technology architecture - Class D
-Dynamic range (analog input to speaker output):	>100dBA typ (20Hz - 20kHz, 8Ω)
-Frequency response:	±0.2dB (10% Rate Power, 20Hz-20kHz, 8Ω)
-Total harmonic distortion, THD+N:	Typical: 0.05% (10% Rated Power, 1kHz, 8Ω)
-Damping factor (Ref 8 Ohms):	Typical: 1000(20Hz-200Hz)
-Maximum analog input level:	+21dBu
-Analog input sensitivity Rated output Power, 1kHz:	0.775Vrms or 32dB
-Analog input impedance:	20k Ohm, electronically balanced
-Analog ground scheme:	AES48 standard compliant
-RMS Voltage:	36.0dB
-Cooling:	Variable speed fans
-Enclosure:	Standard 19"/ 1HU (45mm) and optional rear support system
-Net Weight:	4,25kg / 9.37lbs

TDA Series amplifiers from TecnaRE are engineered to deliver exceptional performance and reliability for professional audio applications. These amplifiers are built to last, with high-quality components that ensure maximum durability and long-lasting performance. TDA Series amplifiers feature two channels and offer exceptional sound quality. The TDA1.3 is a compact amplifier that delivers 300W RMS per channel at 8 ohms, 450W RMS per channel at 4 ohms, and 700W RMS per channel at 2 ohms. The TDA3.6 is a versatile amplifier that delivers 800W RMS per channel at 8 ohms, 1200W RMS per channel at 4 ohms, and 1800W RMS per channel at 2 ohms. The TDA4.8 is a powerful amplifier that delivers 1200W RMS per channel at 8 ohms, 2400W RMS per channel at 4 ohms, and 4800W RMS per channel at 2 ohms.



- 2 Channels
- At 2 Ohms: 1.800W per channel
- At 4 ohms: 1.200W per channel
- At 8 ohms: 800W per channel

-Crest Factor of 7.8 (18dB), 2-Ω nominal load:	1.800W
-Crest Factor of 4.8 (14dB),4-Ohm nominal load:	1.200W
-Crest Factor of 2.8 (9dB),8-Ohm nominal load:	800W
-Bridged, per channel pair, 4 Ohm load:	3.600W
-Bridged, per channel pair, 8 Ohm load:	2.400W
-RMS Voltage:	80.0V
-Number of input channels:	2
-Input types:	2 x Analogue + 2 x link
-Max ambient temperature (full power, no limiting):	45degC (113degF)
-Amplifier modulation scheme:	Proprietary Multi-Loop control technology architecture - Class D
-Dynamic range (analog input to speaker output):	>100dBA typ (20Hz - 20kHz, 8Ω)
-Frequency response:	±0.2dB (10% Rate Power, 20Hz-20kHz, 8Ω)
-Total harmonic distortion, THD+N:	Typical: 0.05% (10% Rated Power, 1kHz, 8Ω)
-Damping factor (Ref 8 Ohms):	Typical: 1000(20Hz-200Hz)
-Maximum analog input level:	+21dBu
-Analog input sensitivity Rated output Power, 1kHz:	0.775Vrms or 32dB
-Analog input impedance:	20k Ohm, electronically balanced
-Analog ground scheme:	AES48 standard compliant
-RMS Voltage:	40.3dB
-Cooling:	Variable speed fans
-Enclosure:	Standard 19"/ 1HU (45mm) and optional rear support system
-Net Weight:	4,9kg. / 10.8lbs

TDA Series amplifiers from TecnaRE are engineered to deliver exceptional performance and reliability for professional audio applications. These amplifiers are built to last, with high-quality components that ensure maximum durability and long-lasting performance. TDA Series amplifiers feature two channels and offer exceptional sound quality. The TDA1.3 is a compact amplifier that delivers 300W RMS per channel at 8 ohms, 450W RMS per channel at 4 ohms, and 700W RMS per channel at 2 ohms. The TDA3.6 is a versatile amplifier that delivers 800W RMS per channel at 8 ohms, 1200W RMS per channel at 4 ohms, and 1800W RMS per channel at 2 ohms. The TDA4.8 is a powerful amplifier that delivers 1200W RMS per channel at 8 ohms, 2400W RMS per channel at 4 ohms, and 4800W RMS per channel at 2 ohms.



- 2 Channels
- At 2 Ohms: 2.400W per channel
- At 4 Ohms: 1.800W per channel
- At 8 Ohms: 1.800W per channel

-Crest Factor of 7.8 (18dB), 2-Ω nominal load:	2.400W
-Crest Factor of 4.8 (14dB),4-Ohm nominal load:	1.800W
-Crest Factor of 2.8 (9dB),8-Ohm nominal load:	1.200W
-Bridged, per channel pair, 4 Ohm load:	4.800W
-Bridged, per channel pair, 8 Ohm load:	3.600W
-RMS Voltage:	98.0V
-Number of input channels:	2
-Input types:	2 x Analogue + 2 x link
-Max ambient temperature (full power, no limiting):	45degC (113degF)
-Amplifier modulation scheme:	Proprietary Multi-Loop control technology architecture - Class D
-Dynamic range (analog input to speaker output):	>100dBA typ (20Hz - 20kHz, 8Ω)
-Frequency response:	±0.2dB (10% Rate Power, 20Hz-20kHz, 8Ω)
-Total harmonic distortion, THD+N:	Typical: 0.05% (10% Rated Power, 1 kHz, 8Ω)
-Damping factor (Ref 8 Ohms):	Typical: 1000(20Hz-200Hz)
-Maximum analog input level:	+21dBu
-Analog input sensitivity Rated output Power, 1 kHz:	0.775Vrms or 32dB
-Analog input impedance:	20k Ohm, electronically balanced
-Analog ground scheme:	AES48 standard compliant
-RMS Voltage:	42.0dB
-Cooling:	Variable speed fans
-Enclosure:	Standard 19"/ 1HU (45mm) and optional rear support system
-Net Weight:	5,1kg. / 11,24lbs



SOUND SERVICES

Professionals in licht en geluid



Ramshoorn 33
4824AG Breda
tel. 076-5324440
mobiel.: 06-83566152
e-mail: mail@soundservices.nl



C/ Encinar 282 - Pol. Ind. Monte Boyal
45950 Casarrubios del Monte (SPAIN)

Phone
(+34) 918 170 110
(+34) 918 171 001

tecnare.com

Contact